

| | | | | | |
|-----------------|---|-----------------|------|--------------|------------|
| Title: | How to configure Video Management | Version: | v1.0 | Date: | 10/10/2018 |
| Product: | AX Series Wireless Security Control Panel | | | Page: | 1 of 5 |

Preparation

1. AX Series Wireless Security Control Panel, V1.0.0 or above
2. Internet Explorer or 4200 (2.7.3.8)

How to configure Video Management


You can add two network cameras to the wireless security control panel, and link the camera with the selected zone for video monitoring. You can also receive and view the event video via client and Email.

1. Add Cameras to the Security Control Panel

- 1) Click System → Network Camera to enter the network camera management page.
- 2) Click Add, and enter the basic information of the camera, such as camera name, IP address, and port No.
- 3) Enter the user name and password of the camera.
- 4) Click Save.

Note

You can add two network cameras for a wireless security control panel.

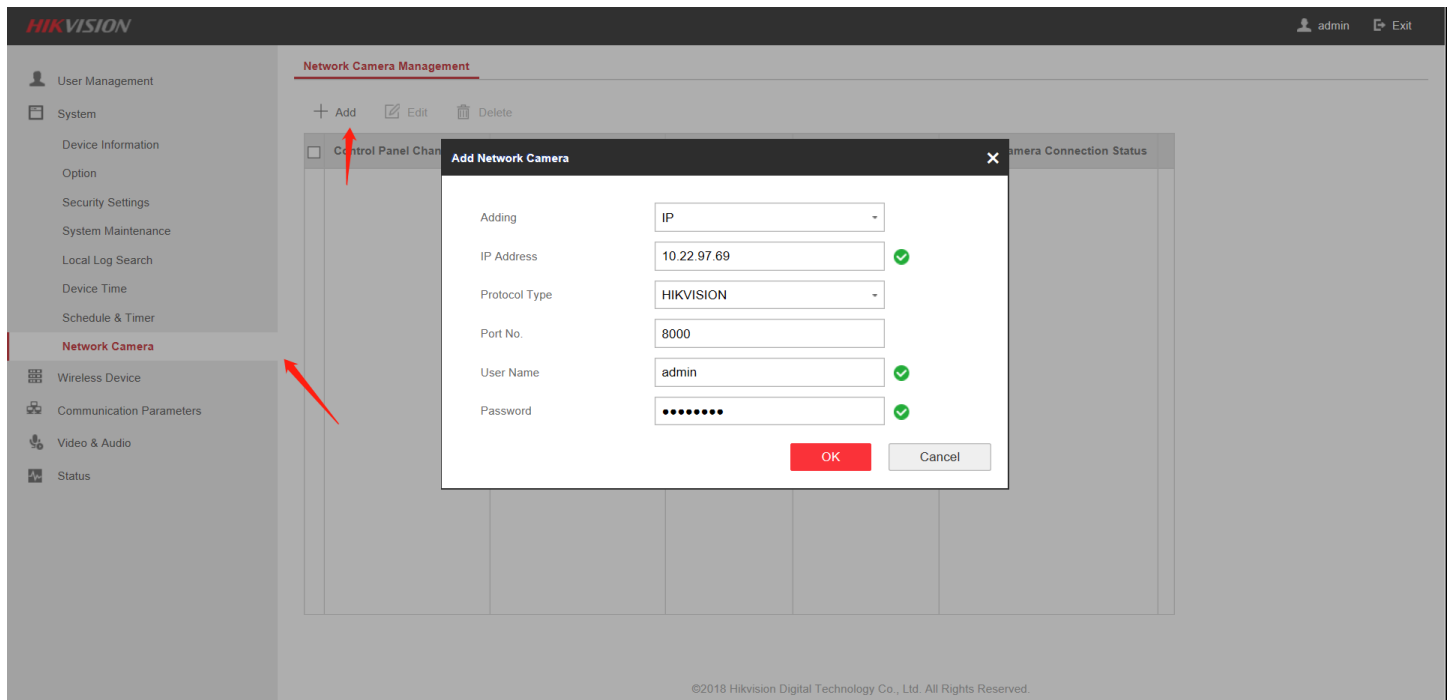

| | | | | | |
|-----------------|---|-----------------|------|--------------|------------|
| Title: | How to configure Video Management | Version: | v1.0 | Date: | 10/10/2018 |
| Product: | AX Series Wireless Security Control Panel | | | Page: | 2 of 5 |

5) Refresh, and check network Camera connection Status.

| Control Panel Channel No. | Network Camera IP Address | Network Camera No. | Network Camera Port | Network Camera Connection Status |
|---------------------------|---------------------------|--------------------|---------------------|----------------------------------|
| 1 | 10.22.97.69 | 1 | 8000 | Connected(Connected) |

2. Link a Camera with the Zone

- 1) Click **Wireless Device** → **Zone** to enter the configuration page.
- 2) Select a zone needs video monitoring, and click the Setting.
- 3) Select the Linked Camera No.
- 4) Click OK.


| Zone | Name |
|------|-----------|
| 1 | wirelessZ |
| 2 | wirelessZ |
| 3 | wirelessZ |
| 4 | wirelessZ |
| 5 | wirelessZ |
| 6 | wirelessZ |
| 7 | wirelessZ |
| 8 | wirelessZ |
| 9 | wirelessZ |
| 10 | wirelessZ |
| 11 | wirelessZ |
| 12 | wirelessZ |
| 13 | wirelessZ |

| | | | | | |
|-----------------|---|-----------------|------|--------------|------------|
| Title: | How to configure Video Management | Version: | v1.0 | Date: | 10/10/2018 |
| Product: | AX Series Wireless Security Control Panel | | | Page: | 3 of 5 |


3. Results Show

APP: Hik-connect

1) When the **Zone** is triggered, notification will show like this, and click the notification

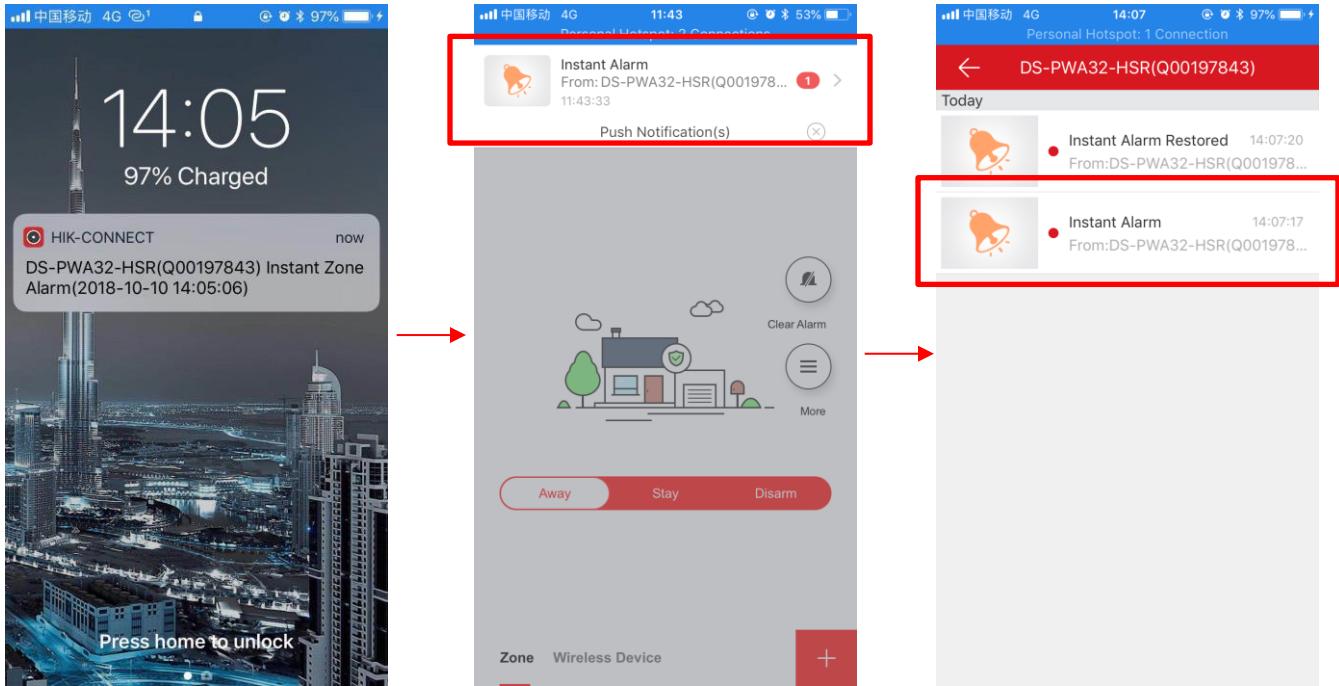


2) Enter the Playback.

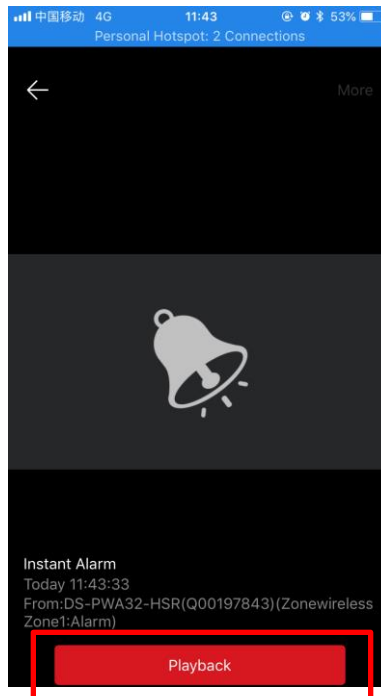


| | | | | | |
|-----------------|---|-----------------|------|--------------|------------|
| Title: | How to configure Video Management | Version: | v1.0 | Date: | 10/10/2018 |
| Product: | AX Series Wireless Security Control Panel | | | Page: | 4 of 5 |

3) You can see then video playback when Zone alarm.If you want storage the video,click

recording.

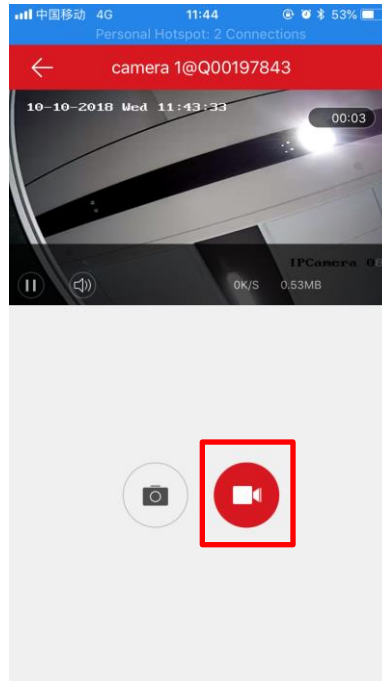

4) You can see the recorded video in **Pictures and Videos**.

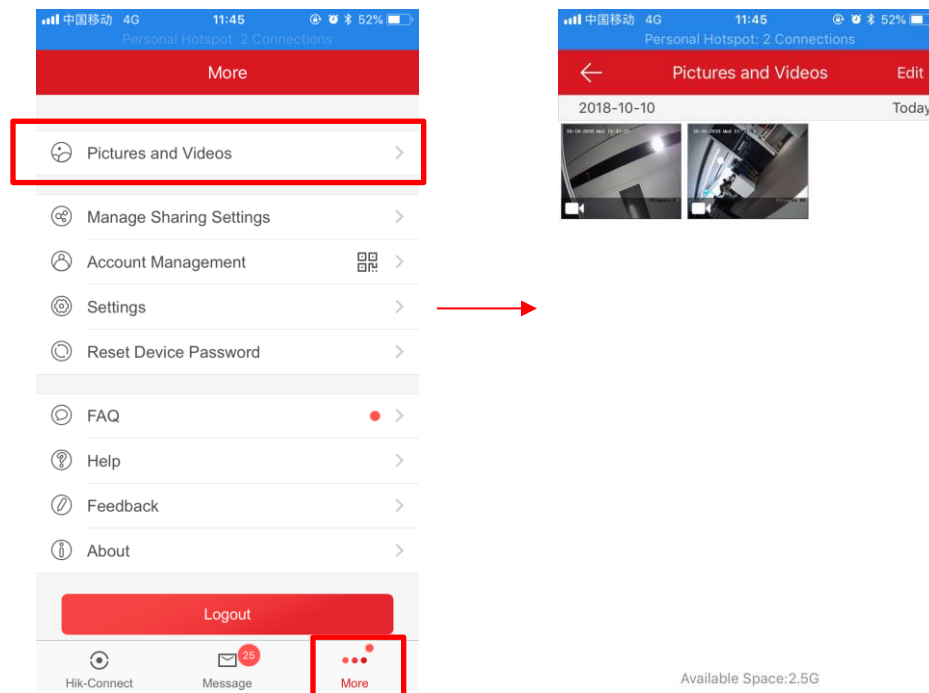


| | | | | | |
|-----------------|---|-----------------|------|--------------|------------|
| Title: | How to configure Video Management | Version: | v1.0 | Date: | 10/10/2018 |
| Product: | AX Series Wireless Security Control Panel | | | Page: | 5 of 5 |

Email:

The alarm video playback will be sent to the email as an attachment.

If you need this feature, refer to document: **How to configure Event Video Transfer via Email Settings.**

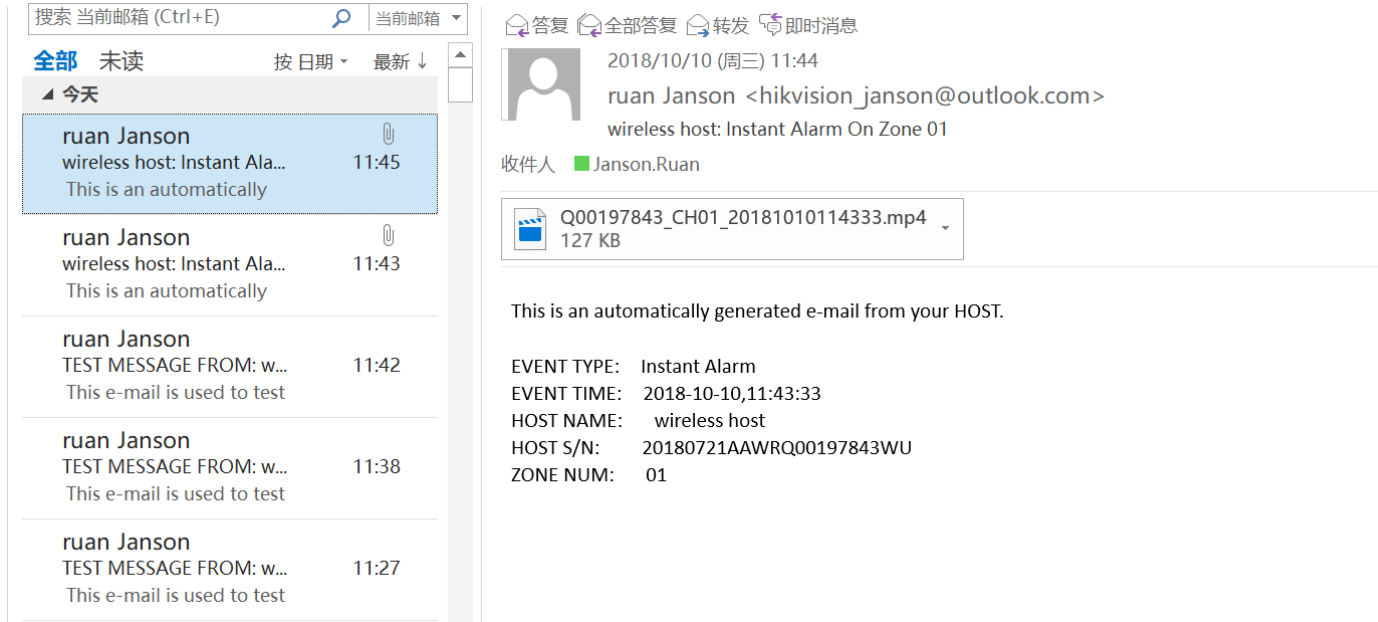

The screenshot shows an email client interface. On the left, a list of messages is displayed, with the most recent one selected. The main pane shows the details of the selected email, including the sender's name and address, the recipient's name, and a list of metadata fields such as Event Type, Event Time, Host Name, Host S/N, and Zone Num. An MP4 video file is attached to the email.

搜索 当前邮箱 (Ctrl+E) 当前邮箱

全部 未读 按日期 最新

今天

ruan Janson
wireless host: Instant Ala... 11:45
This is an automatically

ruan Janson
wireless host: Instant Ala... 11:43
This is an automatically

ruan Janson
TEST MESSAGE FROM: w... 11:42
This e-mail is used to test

ruan Janson
TEST MESSAGE FROM: w... 11:38
This e-mail is used to test

ruan Janson
TEST MESSAGE FROM: w... 11:27
This e-mail is used to test

答复 全部答复 转发 即时消息

2018/10/10 (周三) 11:44

ruan Janson <hikvision_janson@outlook.com>
wireless host: Instant Alarm On Zone 01

收件人 Janson.Ruan

Q00197843_CH01_20181010114333.mp4
127 KB

This is an automatically generated e-mail from your HOST.

EVENT TYPE: Instant Alarm
EVENT TIME: 2018-10-10,11:43:33
HOST NAME: wireless host
HOST S/N: 20180721AAWRQ00197843WU
ZONE NUM: 01

First Choice for Security Professionals
HIKVISION Technical Support