

Title:	How to Add Wireless Control Panel to Hik-connect	Version:	v1.0	Date:	10/9/2018
Product:	AX Series Wireless Security Control Panel			Page:	1 of 5

Preparation

- Hik-Connect Client: IOS: V3.6.0 180922 / Android: V3.6.1 180928 or above
- 2. AX Series Wireless Security Control Panel, V1.0.0 or above

How to Add Wireless Control Panel to Hik-Connect

1. Add the device to Hik-Connect

- 1) Power on the control panel
- 2) Scan QR Code to enter the Scan QR code page. Scan the QR code on the control panel.




3) Tap Connect to a Network.






Title:	How to Add Wireless Control Panel to Hik-connect	Version:	v1.0	Date:	10/9/2018
Product:	AX Series Wireless Security Control Panel			Page:	2 of 5

4) Tap Wireless Connect on the Adding Type page.

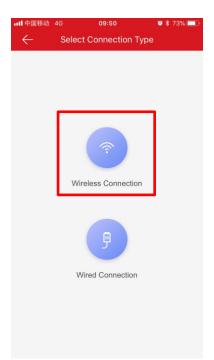


5) Follow the instructions and change the control panel to the AP mode. Tap Next.

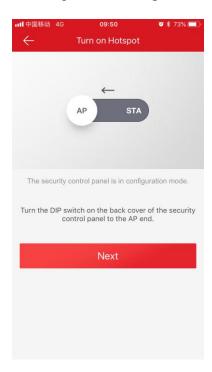



Title:	How to Add Wireless Control Panel to Hik-connect	Version:	v1.0	Date:	10/9/2018
Product:	AX Series Wireless Security Control Panel			Page:	3 of 5

6) Configure Wi-Fi for the device to connect.(You phone need connect to the Wi-Fi)

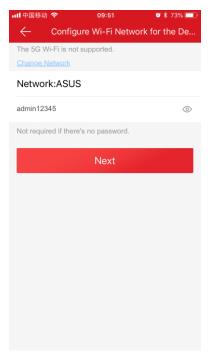

7) Follow the instructions on the Hik-connect and connect the mobile phone with the control panel via wireless connection.









Title:	How to Add Wireless Control Panel to Hik-connect	Version:	v1.0	Date:	10/9/2018
Product:	AX Series Wireless Security Control Panel			Page:	4 of 5

8) Create a device password for device activation, and enter activate.

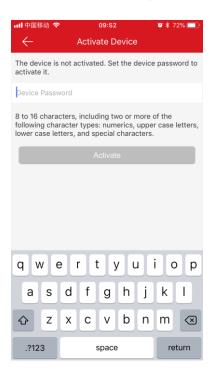


9) Follow the instructions and change the control panel to the Station mode. Tap Next.

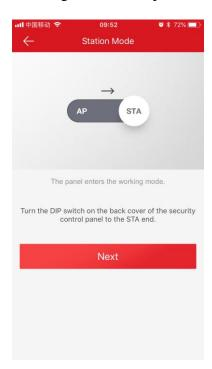



Title:	How to Add Wireless Control Panel to Hik-connect	Version:	v1.0	Date:	10/9/2018
Product:	AX Series Wireless Security Control Panel			Page:	5 of 5

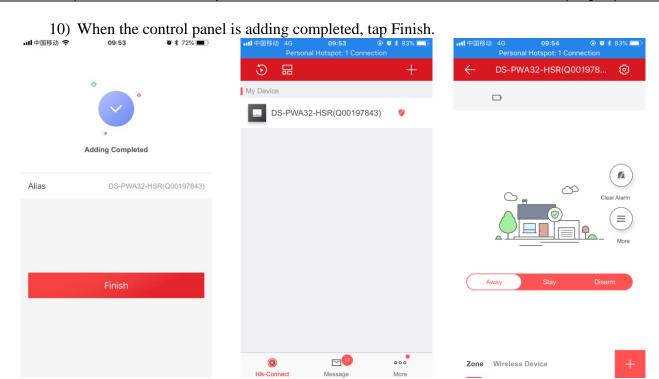

First Choice for Security Professionals HIKVISION Technical Support