

2/3/4 Megapixel H.265 Remote Focus&Zoom Pro Bullet Network Camera





MS-C2862-F(I)PB/MS-C2962-F(I)PB/MS-C3762-F(I)PB/
MS-C4462-F(I)PB



KEY FEATURES

- 0.002Lux Starlight
- Super WDR up to 140dB
- H.265 High Efficiency Video Coding
- Integrated Motorized Varifocal Lens(Auto Focus)
- Built-in ICR Filter for Day/Night switching
- 3D-DNR, Privacy Masking and Motion Detection
- Micro SD/SDHC/SDXC card local storage support
- Built-in efficient IR LEDs, IR distance up to 35m
- Weather-proof IP66-rated Housing
- Built-in 802.3af Compliant PoE
- Support ONVIF Profile S

DIMENSIONS (mm)

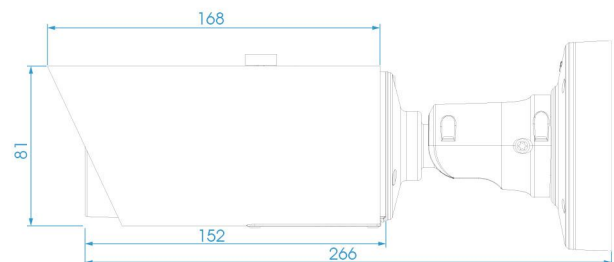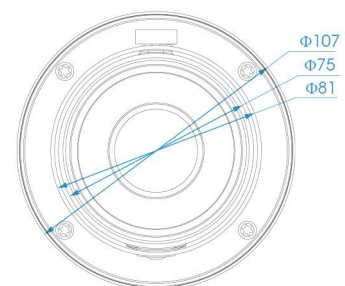

SUPPORTED BROWSERS





	Model	MS-C2862-F(I)PB (2.0MP)	MS-C2962-F(I)PB (2.0MP)	MS-C3762-F(I)PB (3.0MP)	MS-C4462-F(I)PB (4.0MP)
Camera	Image Sensor	1/1.8" Exmor CMOS	1/2.8" Progressive Scan CMOS		1/3" Progressive Scan CMOS
	Min. Illumination	Color:0.002Lux @F1.2 B/W:0Lux with IR on		Color: 0.005Lux @F1.2 B/W: 0Lux with IR on	Color: 0.008Lux @F1.2 B/W: 0Lux with IR on
	WDR	Super WDR up to 120dB	Super WDR up to 140dB	Super WDR up to 120dB	
	Lens	Motorized 3.6~10mm@F1.4 P-Iris(Optional)	Motorized 3.0~10.5mm/7~22mm @F1.4 P-Iris(Optional)		
	Mount	Φ14			
	Field of View	H92°~H42°(3.6~10mm)	H90°~ H31°(3.0~10.5mm)	H80°~ H29°(3.0~10.5mm)	H76.2°~H25°(3.0~10.5mm)
	Shutter Time	1/100000s~1/5s			
	IR Distance	Up to 35m			
	Day&Night	ICR Filter Auto Switch			
Video	Max Image Resolution	1920×1080		2048x1536	2592×1520
	Frame Rate	30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704x576)		30fps(2048x1536), 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704x576)	20fps(2592×1520), 30fps(2304×1296), 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704x576)
	Video Compression	H.265(HEVC)/H.264/MJPEG			
	Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)			
	Image Setting	Brightness/Contrast/Saturation/Sharpness			
	Video Output	1.0Vp-p CVBS Output (75 Ω)			
Network	Ethernet	1*RJ45 10M/100M Ethernet Port			
	Network Storage	NAS(Support NFS, SMB/CIFS)			
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, IPv6, PPPoE, VLAN			
Audio	Audio Compression	G.711/AAC			
	Audio I/O	1/1			
System	Alarm I/O	1/1			
	Storage	Support Micro SD/SDHC/SDXC Local Storage, up to 64G			
	Advanced Function	Motion Detection, Privacy Masking, Backlight Compensation, 3D-DNR, ROI			
	SIP/VoIP Support	Yes, Voice & Video-over-IP			
	Event Trigger	Motion Detection, Network Disconnection, etc.			
	Event Action	FTP Upload/ SMTP Upload/ SD Card Record/ SIP Phone			
General	System Compatibility	ONVIF Profile S			
	Working Temperature	-30℃~60℃			
	Working Humidity	0~90%(Non-condensing)			
	Power Supply	PoE/ DC12V±10%			
	Power Consumption	5W MAX	6W MAX	5W MAX	
		9W MAX (With IR on)	10.5W MAX (With IR on)	9W MAX (With IR on)	
	Weather Proof	Up to IP66 Rating for Weather-resistant Performance			
	Weight	1080g			
	Dimensions	Φ107mmX266mm			
Warranty	2 Years				

Note: MS-C2962-F(I)PB,F refers to Motorized Lens,I refer to P-Iris,P refers to PoE,B refers to H.265 V6.09

